


BD-1105

Fully-automatic Interpenetration Type
Strapping Machine

MODEL SERIES:

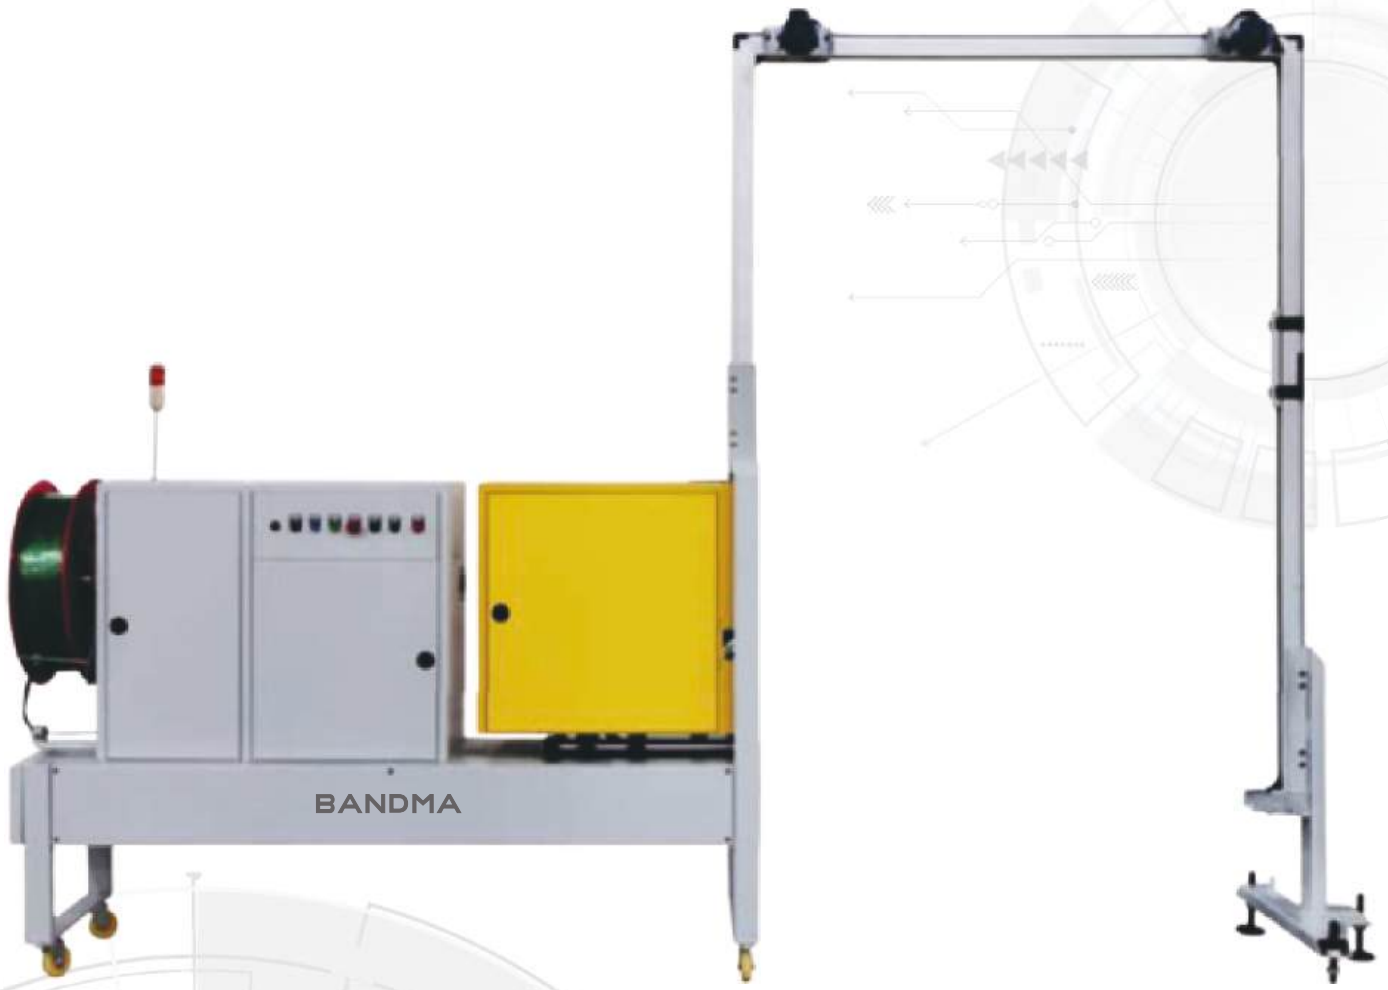

BANDMAEQUIPCORLIMITED

contact@bandmainfo.com | www.bandmainfo.com

Corporate Office: Ferdeplex, A-16, Swarn Park Extension, Mundka Colony, New Delhi-110041

Basic Information

Model	BD-1105 (BANDMA EDGE)
Power supply	415V/50Hz, 1600W/4A
Air pressure	0.4-0.6 MPa
Strapping speed	≤15 sec/beat
Strapping force	0.90 kg
Straps specification	<p>PP</p> <p>Width (9-15 mm) ± 1 mm, thickness (0.55 -1.0 mm) ± 0.1mm</p> <p>Strap coil, width 160-180 mm, inner diameter 220 - 210 mm, outer diameter 400 - 500 mm</p> <p>Stretching resistance: maximum 150 kg</p> <p>Length/reel, about 4000 - 2000 m</p>
Strapping mode	Parallel 1 to multi-straps penetrated by rodless cylinder, control mode: photoelectric control, and manual mode.
Overall dimensions	L4430 mm × W650 mm × H2600 mm
Arch size	W1500 mm × H1800 mm (for standard factories)
Machine weight	350 kg
Noise	≤ 80 dB(A)
Environment condition	Relative humidity ≤ 90%, temperature 0°C - 40°C
Adhesion type	Hot melt, side adhesion: Adhesive surface ≥ 90%, adhesive width ≥ 20%, deviation of adhesive position ≤ 2 mm

BANDMA EQUIP CORP LIMITED

contact@bandmainfo.com | www.bandmainfo.com

Corporate Office: Ferdeplex, A-16, Swarn Park Extension, Mundka Colony, New Delhi-110041