

| Ingenuity At Work

RELIABLE | EXPERIENCED | INNOVATIVE



POLYPROPYLENE (PP) STRAPPING

B | BANDSTRAP - ONE STRAP AHEAD
STRAPPING SOLUTIONS

SAFETY | SPEED | EFFICIENCY

Products manufactured from diverse materials, in varying sizes and shapes, require **secure packaging** for safe storage and transportation. **BANDMA® PP Strapping** offers a dependable and versatile packaging solution across a wide range of industries, including construction materials, logistics, furniture, corrugated boards, printed media, newspapers, and more.

YOUR ADVANTAGE

With **BANDMA® PP**, you benefit daily from our **technological leadership in strapping extrusion**. Backed by an in-house **Research & Development team**, we design **customized solutions** that ensure maximum protection of your goods during storage and transit.

The safety of your products is ensured through the **optimal balance of elongation and holding force**. The consistent and reliable quality of **BANDMA® PP** is achieved by using **premium-grade raw materials**, combined with over **25 years of expertise** in polypropylene extrusion.

Our PP strapping delivers excellent stiffness and **superior machine performance**, enabling high-speed operations and optimized cycle times. Advanced embossing technology ensures dust-free operation, keeping machines efficient and maintenance-friendly.

All BANDMA® PP straps are manufactured **without toxic additives** and are **100% recyclable**, supporting environmentally responsible packaging.





KEY BENEFITS



Trouble-free
machine operation



Supports more
than **50 strapping**
cycles/min.



No splitting or
cracking



Dust-free
performance



Wide range
of **BANDMA® PP**
products



Suitable for
diverse industrial
applications



Consistent &
reliable quality



Optimized **strap**
stiffness



Tested & approved
for automatic
strapping machines



Strong **technical**
expertise for users



Professional
training programs
for partners




TECHNOLOGICAL LEADERSHIP

POLYPROPYLENE STRAPPING


Bandstrap® PP

B | **BANDSTRAP**
STRAPPING SOLUTIONS


PRECISION ENGINEERING FOR SMOOTH PERFORMANCE

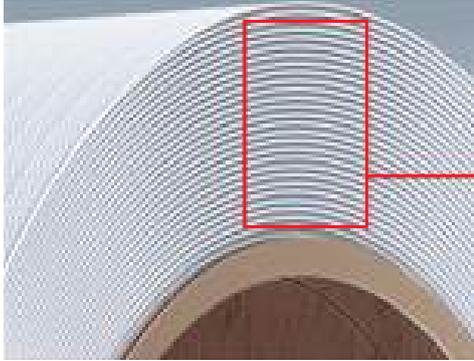

Precision Winding for hassle-free operation

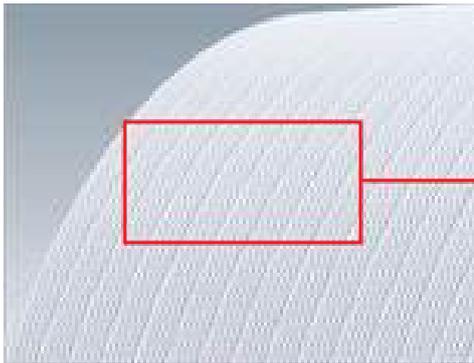

Gap-free flat winding ensures smooth strap flow

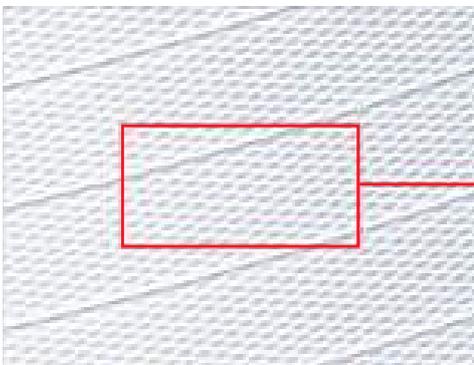

Embossed surface design enhances aesthetics and provides slip-free performance



Note: Embossed designs are subject to change without prior notice.

FEATURES



BANDMA® PP Straps
are available in
**5, 6, 8, 9, 10, 11, 12, 15, 16,
18 & 19 mm widths**



Offered in White, Natural,
and various colors, with
**online rotogravure printing for
superior print quality**



Manufactured using
advanced, fully automatic,
high-tech production facilities,
ensuring superior consistency



Designed for smooth,
uninterrupted performance on
fully automatic machines, even at
high-speed packaging operations




Customized specifications
are available to meet precise
customer requirements

MACHINE COMPATIBILITY


BANDMA® Polypropylene Straps deliver consistent and reliable performance on:



High-Speed Fully Automatic Strapping Machine.

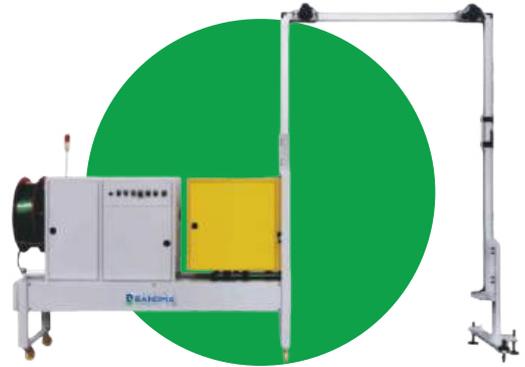


Pallet Strapping Machine

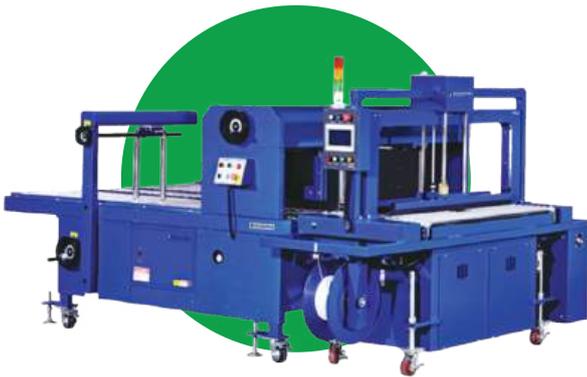

Squaring & Strapping Machine With Top Press.



Fully Automatic strapping Machine

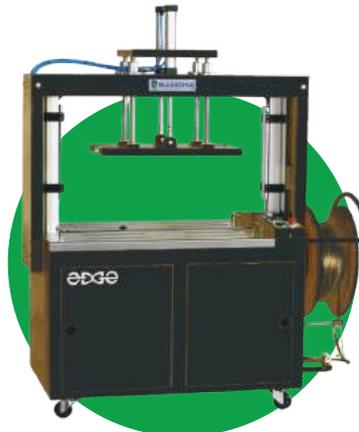

Fully Automatic Strapping Machine With Top Press.

STRAP FOR FULLY AUTOMATIC MACHINES

Bandstrap® PP

| | Product | Name | Description |
|----------|---------------|----------------------|---|
| STANDARD | BANDMA® GP | Gree Performance | Environment friendly, high quality automatic strapping for standard applications |
| | BANDMA® T | | <p>BANDMA® adept High quality automatic strap from 5-6 mm width fulfilling the high speed quality requirements of the newspaper</p> <p>BANDMA® panache: High quality automatic strap from 7-16 mm width</p> |
| | BANDMA® verve | High Elastic | High quality automatic strap with high elongation for applications with shrinking packaging volume and sharp edges. |
| SPECIAL | BANDMA® super | Super High Elastic | High quality automatic strap with very high elongation for smallest packaging units or applications requiring highest elongation. |
| | BANDMA® eclat | Low Creep Elongation | High quality automatic strap with low elongation for compressed packaging goods requiring low elongation. |

STANDARD SPECIFICATIONS

SEMI-AUTOMATIC MACHINE APPLICATIONS

| Product Code | Width (in mm) (± 0.05) | Thickness (in mm) (± 0.03) | Length/m (Per Roll) (± 5%) | Net weight (Per Roll) (± 0.100 kg.) | Average Break Load (in kg) | Remark |
|--------------|------------------------|----------------------------|----------------------------|-------------------------------------|----------------------------|------------|
| BDP605 | 6.00 | 0.50 | 2000 | 3.500 | 52 | Customized |
| BDP605 | 6.00 | 0.50 | 3000 | 5.250 | 52 | Standard |
| BDP606 | 6.00 | 0.60 | 3000 | 6.000 | 60 | Standard |
| BDP805 | 8.00 | 0.50 | 2000 | 4.700 | 65 | Customized |
| BDP805 | 8.00 | 0.50 | 3000 | 7.000 | 65 | Customized |
| BDP905 | 9.00 | 0.50 | 2000 | 5.000 | 70 | Standard |
| BDP905 | 9.00 | 0.50 | 3000 | 7.500 | 70 | Standard |
| BDP906 | 9.00 | 0.60 | 2000 | 6.000 | 75 | Standard |
| BDP1006 | 10.00 | 0.60 | 2000 | 6.500 | 80 | Customized |
| BDP1006 | 11.00 | 0.50 | 2000 | 6.300 | 75 | Customized |
| BDP1106 | 11.00 | 0.60 | 2000 | 7.000 | 85 | Standard |
| BDP1107 | 11.00 | 0.70 | 2000 | 8.000 | 110 | Standard |
| BDP1205 | 12.00 | 0.50 | 2000 | 7.000 | 85 | Standard |
| BDP1206 | 12.00 | 0.60 | 2000 | 8.000 | 110 | Standard |
| BDP1505 | 15.00 | 0.50 | 2000 | 0.50 | 110 | Standard |
| BDP1505 | 15.00 | 0.50 | 1000 | 7.500 | 110 | Standard |
| BDP1506 | 15.00 | 0.60 | 1500 | 6.00 | 125 | Standard |
| BDP1507 | 15.00 | 0.70 | 1000 | 7.000 | 140 | Standard |
| BDP1508 | 15.00 | 0.80 | 1000 | 8.000 | 160 | Customized |
| BDP1805 | 18.00 | 0.50 | 1000 | 7.000 | 150 | Customized |
| BDP1806 | 18.00 | 0.60 | 1000 | 8.000 | 165 | Standard |
| BDP1807 | 18.00 | 0.70 | 1000 | 9.000 | 175 | Standard |

ADDITIONAL INFORMATION:

- Elongation: Up to 25%
- Standard Colors: White & Yellow (other colors on request, subject to MOQ)
- Core Sizes Available:
200 mm ID × 165 mm
406 mm ID × 150 / 165 mm

All specifications mentioned apply to virgin quality material. Economical grades are also available, where tolerances may vary. Customized specifications can be developed based on customer requirements and bulk order quantities.

Note: Embossed designs are subject to change without prior notice.

STANDARD SPECIFICATIONS

FULLY AUTOMATIC MACHINE APPLICATIONS

| Product Code | Width (in mm) (± 0.05) | Thickness (in mm) (± 0.03) | Length/m (Per Roll) (± 5%) | Net weight (Per Roll) (± 0.100 kg.) | Average Break Load (in kg) | Remark |
|--------------|------------------------|----------------------------|----------------------------|-------------------------------------|----------------------------|------------|
| SPP806 | 8 | 0.60 | 2000 | 5.800 | 65 | Customized |
| SPP807 | 8 | 0.70 | 2000 | 6.300 | 80 | Customized |
| SPP955 | 9 | 0.55 | 4000 | 12.00 | 75 | Customized |
| SPP906 | 9 | 0.60 | 2000 | 6.300 | 80 | Standard |
| SPP907 | 9 | 0.70 | 2000 | 7.000 | 85 | Standard |
| SPP1006 | 10 | 0.60 | 2000 | 6.750 | 85 | Customized |
| SPP1106 | 11 | 0.60 | 2000 | 7.000 | 90 | Standard |
| SPP1107 | 11 | 0.70 | 2000 | 8.000 | 110 | Standard |
| SPP1255 | 12 | 0.55 | 2500 | 10.00 | 120 | Customized |
| SPP1255 | 12 | 0.55 | 3000 | 12.00 | 120 | Customized |
| SPP1206 | 12 | 0.60 | 2000 | 8.000 | 110 | Standard |
| SPP1207 | 12 | 0.70 | 2000 | 9.000 | 120 | Standard |
| SPP1208 | 12 | 0.80 | 2000 | 10.00 | 120 | Customized |
| SPP1506 | 15 | 0.60 | 1000 | 6.000 | 130 | Standard |
| SPP1506 | 15 | 0.60 | 1500 | 9.000 | 130 | Standard |
| SPP1507 | 15 | 0.70 | 1000 | 7.000 | 150 | Standard |
| SPP1507 | 15 | 0.70 | 1500 | 10.50 | 150 | Standard |
| SPP1508 | 15 | 0.80 | 1000 | 8.000 | 160 | Customized |
| SPP1509 | 15 | 0.90 | 1000 | 9.000 | 170 | Customized |
| SPP1806 | 18 | 0.60 | 1000 | 7.000 | 170 | Standard |
| SPP1807 | 18 | 0.70 | 1000 | 8.000 | 175 | Standard |
| SPP1808 | 18 | 0.80 | 1000 | 9.000 | 180 | Standard |

- Elongation: Up to 25%
- Standard Colors: White & Yellow
- Core Sizes: 200 mm ID × 165 mm, 406 mm ID × 150 / 165 mm

STANDARD SPECIFICATIONS

HIGH-SPEED FULLY AUTOMATIC MACHINES

| Product Code | Width (in mm) (± 0.05) | Thickness (in mm) (± 0.03) | Length/m (Per Roll) (± 5%) | Net weight (Per Roll) (± 0.100 kg.) | Average Break Load (in kg) | Remark |
|--------------|------------------------|----------------------------|----------------------------|-------------------------------------|----------------------------|----------|
| BDP547 | 5.00 | 0.47 | 7000 | 10.00 | 38 | Standard |
| BDP505 | 5.00 | 0.50 | 6500 | 9.750 | 42 | Standard |
| BDP505 | 5.00 | 0.50 | 5300 | 8.000 | 42 | Standard |

- Elongation : Up to 15%
- Standard Colors : White & Black
- Paper Core Specification : 203mm ID x 190mm, 150mm ID x 152mm

Note : Embossed designs are Subject to change without prior notice.



Web:

www.bandmainfo.com
www.bandma.in

Head Office:

BANDMA HOUSE
E-36A, New Multan Nagar,
Rohtak Road,
New Delhi-110056 (INDIA)

Contact:

+91 92893 54148 / +91 92056 95561

TOLL FREE No.: 1800-309-2980

Intellectual Property (IP) – Patents

Mail ID's:

contact@bandmainfo.com
marketing@bandmainfo.com

Works:


- FERDEPLEX,
A-16, Swarn Park Extension,
Mundka, Delhi – 110041
- E-162, Sector-1, Bawana,
New Delhi – 110039 (INDIA)

Bandma India Private Limited

EPR No.: BO-11-DEL-09-AACCR4620A-25

Bandma EquipCorp Limited

EPR No.: BO-11-DEL-09-AAICB8160H-25



B | BANDSTRAP
strapping solutions

BANDMA[®]
we innovate. we care.