




BANDMA STEEL STRAPPING

# Ingenuity at Work

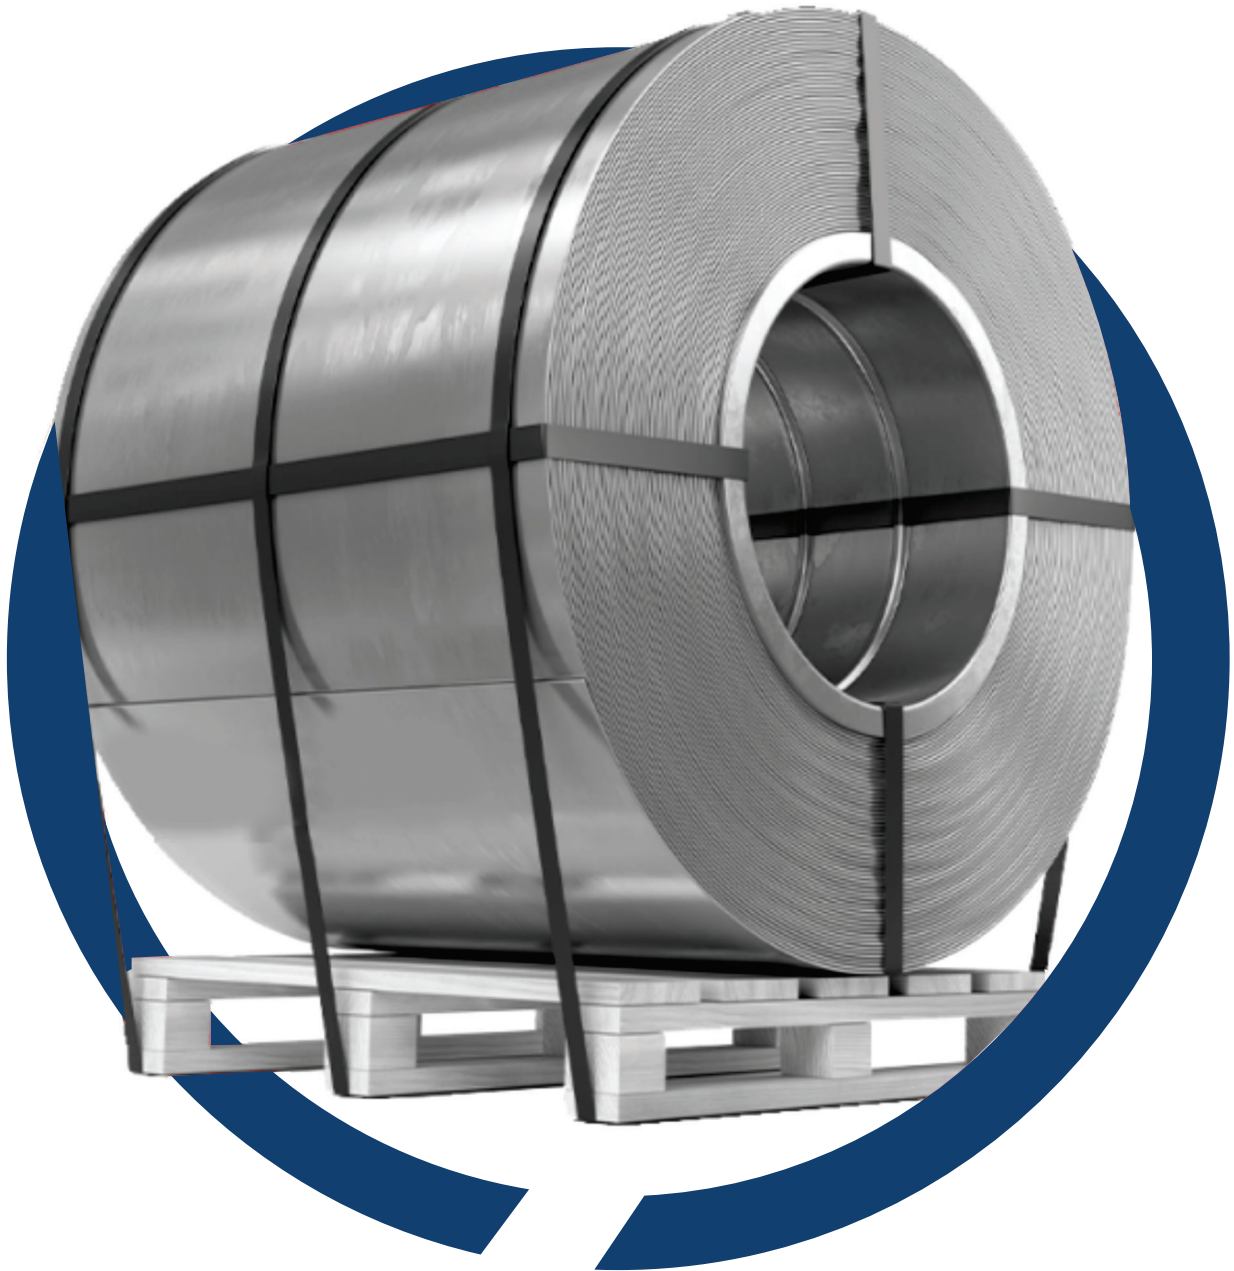

RELIABLE  
EXPERIENCED  
INNOVATIVE

**B** | **BANDSTRAP**  
STRAPPING SOLUTIONS

# MEDIUM CARBON SUPERFLEX STEEL STRAPPING

## Bandstrap® STEEL STRAP



### SPECIFICATION CHART MEDIUM CARBON SUPERFLEX STEEL STRAPPING

Size	Width mm	Thick mm	Break Load	UTS Kg/mm <sup>2</sup>	Bend	Elongation (150mmGL)	Winding	Yield (M/kg)
1215	12.70	0.38	377	78.0	2	1.5% max	Mill	26.4
1218	12.70	0.46	450	77.0	2	1.5% max	Mill	21.8
1223	12.70	0.58	552	75.0	2	1.5% max	Mill	17.3
5815	15.88	0.38	470	78.0	2	1.5% max	Mill	21.1
5818	15.88	0.46	562	77.0	2	1.5% max	Mill	17.4
5820	15.88	0.51	623	77.0	2	1.5% max	Mill	15.7
5823	15.88	0.58	690	75.0	2	1.5% max	Mill	13.8
3415	19.05	0.38	564	78.0	2	1.5% max	Mill	17.6
3418	19.05	0.46	674	77.0	2	1.5% max	Mill	14.5
3420	19.05	0.51	728	75.0	2	1.5% max	Mill	13.2
3423	19.05	0.58	830	75.0	2	1.5% max	Mill	11.5
3425	19.05	0.64	915	75.0	2	1.5% max	Mill	10.3
1425	31.75	0.64	1425	73.0	2	1.5% max	Ribbon	6.2
1431	31.75	0.79	1830	73.0	2	1.5% max	Ribbon	5.1



#### TOLERANCE

<b>Width</b>	: ± 0.127 mm
<b>Thick</b>	: +0.05 mm, -0.025mm
<b>Paint Thick</b>	: 5.0 Microns
<b>Wax</b>	: Water Soluble
<b>Coil ID / OD</b>	: 406/680 mm
<b>Coil Weight</b>	: 45-50 Kgs Approx.
<b>Jumbo Coil Wt.</b>	: 225-450 Kgs Approx.

# LOW CARBON UNIFLEX STEEL STRAPPING

## Bandstrap® STEEL STRAP




### SPECIFICATION CHART LOW CARBON UNIFLEX STEEL STRAPPING

Size	Width mm	Thick mm	Break Load	UITS Kg/mm <sup>2</sup>	Bend	Elongation (150mmGL)	Winding	Yield (M/kg)
1215	12.70	0.38	377	78.0	2	1.5% max	Mill	26.4
1218	12.70	0.46	450	77.0	2	1.5% max	Mill	21.8
1223	12.70	0.58	552	75.0	2	1.5% max	Mill	17.3
5815	15.88	0.38	470	78.0	2	1.5% max	Mill	21.1
5818	15.88	0.46	562	77.0	2	1.5% max	Mill	17.4
5820	15.88	0.51	623	77.0	2	1.5% max	Mill	15.7
5823	15.88	0.58	690	75.0	2	1.5% max	Mill	13.8
3415	19.05	0.38	564	78.0	2	1.5% max	Mill	17.6
3418	19.05	0.46	674	77.0	2	1.5% max	Mill	14.5
3420	19.05	0.51	728	75.0	2	1.5% max	Mill	13.2
3423	19.05	0.58	830	75.0	2	1.5% max	Mill	11.5
3425	19.05	0.64	915	75.0	2	1.5% max	Mill	10.3
1425	31.75	0.64	1425	73.0	2	1.5% max	Ribbon	6.2
1431	31.75	0.79	1830	73.0	2	1.5% max	Ribbon	5.1



#### TOLERANCE

<b>Width</b>	: ± 0.127 mm
<b>Thick</b>	: +0.05 mm, -0.025mm
<b>Paint Thick</b>	: 5.0 Microns
<b>Wax</b>	: Water Soluble
<b>Coil ID / OD</b>	: 406/680 mm
<b>Coil Weight</b>	: 45-50 Kgs Approx.

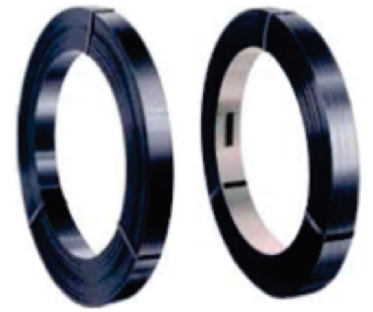

# Bandstrap® STEEL STRAP



**Web:**

<http://www.bandmainfo.com>

<http://www.bandma.in>

**For Contact :** [marketing@bandmainfo.com](mailto:marketing@bandmainfo.com)

**For feedback & complaints :** [support@bandmainfo.com](mailto:support@bandmainfo.com)

**Head Office:**

**BANDMA HOUSE**

E-36A, New Multan Nagar, Rohtak Road,  
New Delhi - 110056 (INDIA)

**Corporate Office:**

**FERDEPLEX**, A-16, Swarn Park Extention,  
Mundka Colony, New Delhi - 110041 (INDIA)

**Contact:**

+011-45518758, +91-9289354145, +91-9319291057

**B | BANDSTRAP**  
strapping solutions

**B BANDMA®**  
we innovate. we care.