


## Automatic sealing machine

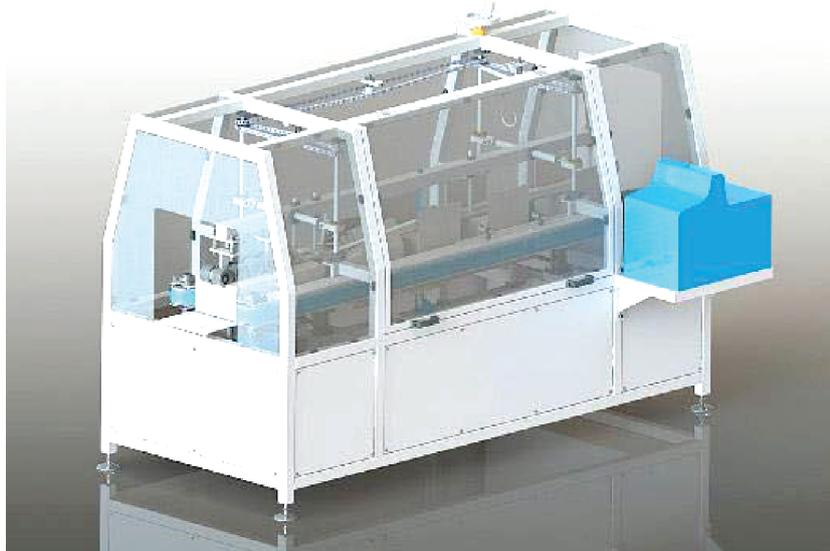

- The automatic sealing machine is suitable for sealing requirements of various corrugated boxes.

For example, beverage, food, medicine, daily necessities.

- And outer packaging of hotel supplies, which replaces the traditional tape sealing in cold, hot or humid conditions.
- Maintain adhesion underneath.
- Environmentally friendly, effectively reducing production costs.

- **Main spare parts**

- 1. Hot melt glue machine is piston pump with one output.**




|                    |                    |             |
|--------------------|--------------------|-------------|
| VOLTAGE            | V                  | 220         |
| POWER              | WATT               | 2000        |
| TANK CAPACITY      | LITER              | 5           |
| MAX.MELTING RATE   | KG/HOUR            | 7           |
| MAX.OPERATION TEMP | °C                 | 200         |
| AIR PRESSUER       | KG/CM <sup>2</sup> | 4-6         |
| DIMENSION: L×W×H   | MM                 | 400×350×670 |
| WEIGHT             | KG                 | 32          |
| MAX.CPS            | CPS                | 12000       |
| PUMP TYPE          |                    | PISTON PUMP |
| OUTPUT             | SET                | 1           |
| MOTOR POWER        | WATT               | 120         |

**2. Hot melt glue hose 3 meters one pc.**



|                    |                    |     |
|--------------------|--------------------|-----|
| VOLTAGE            | V                  | 220 |
| POWER              | WATT               | 360 |
| MAX.OPERATION TEMP | °C                 | 200 |
| AIR PRESSUER       | KG/CM <sup>2</sup> | 4-6 |

**3. Hot melt glue automatic glue gun with coating 4 lines one set.**

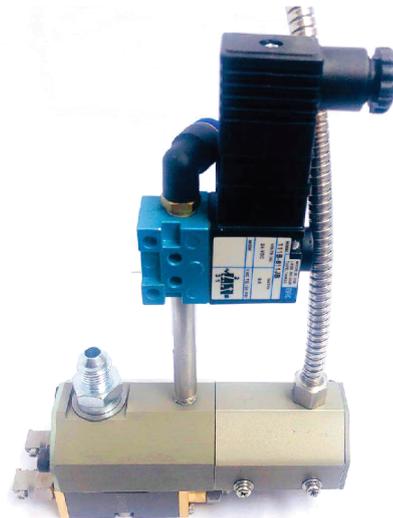

|                    |                    |       |
|--------------------|--------------------|-------|
| VOLTAGE            | V                  | 220   |
| POWER              | WATT               | 200   |
| MAX.OPERATION TEMP | °C                 | 200   |
| AIR PRESSUER       | KG/CM <sup>2</sup> | 4-6   |
| VALVE POWER        | V                  | 24VDC |

**4. Another parts as following:**

**Chint open 2P 1PC**

**Solid state 1 PC**

**SICK Photoelectric 1 PC**

**Yutian Electric Motor 2 SETS**

**OMRON encoder 1PC**

**Weiluntong touch screen 1 PC**

**Stepping 2 SETS**

**Ming Wei 36V power supply board 1 SET**

**Mibbo 24V power supply board 1 SET**

**Hexin PLC 1PC**

**Aerospace Elevator 1 PC**

● **Operating mode:**

Hot melt adhesive sealing machine top

Manual loading of materials

Automatic adjusted box size by PLC control.

● **Machine workflow:**

The inlet box is joined by a stainless steel plate and the left and right grass belts to reach the designated area to open the box and spray the glue, and then enter the box page to bond the box page.

● **Main parameters and configuration:**

Machine size:L2200X W 1300X H1800 mm

Packing size:L2350XW 1450XH2000 mm

Gross weight: 500kgs

Speed: 10 20 cases / minute

Air pressure: 4- 6kgs

Power: 220V 50Hz 3.8KW

Applicable box size:

Length 100mm- 500mm x Width 180mm- 450mm x Height 120mm- 400mm

● **Remark: The box size adjusted can make according client's inquiry.**